
Compendium of TN/TR Series

TN series is enterprises standard, TR series is JIS standard

Multi-type cylinder

TN: Twin-rod cylinder (Double acting type)




TR: Twin-rod cylinder (Double acting type)



Bumper in front of the barrel

Bumper in front of the barrel can adjust the stroke of cylinder and relieve impact.

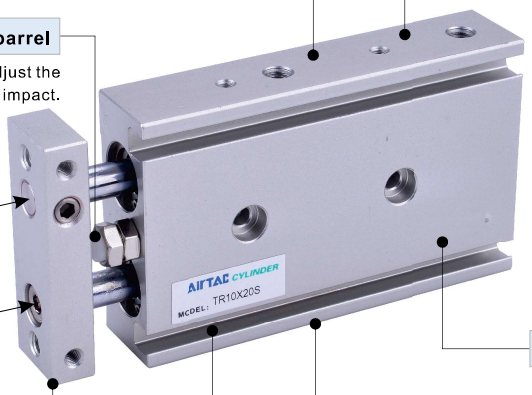


Twin-rod cylinder

It is good resistance to bending and twisting moments.


Five or six bore size are available

TN series bore size:10, 16, 20, 25, 32
TR series bore size:6, 10, 16, 20, 25, 32

Be mounted the workpiece from three directions

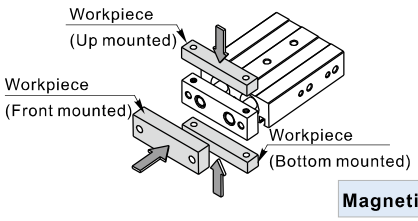

Mounted from four directions

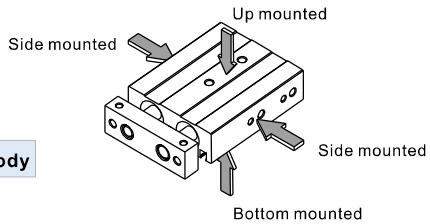

Magnetic switch slots around the cylinder body

There are magnetic switch slots around the cylinder body convenient to install inducting switch.

Criteria for selection: Cylinder thrust

Unit : Newton(N)


Bore size	Rod size	Acting type		Pressure area(mm^2)	Operating pressure(MPa)						
					0.1	0.2	0.3	0.4	0.5	0.6	0.7
6	4	Double acting	Push side	56.5	5.7	11.3	17.0	22.6	28.3	33.9	39.6
			Pull side	31.4	3.1	6.3	9.4	12.6	15.7	18.8	22.0
10	6	Double acting	Push side	157.1	15.7	31.4	47.1	62.8	78.6	94.3	110.0
			Pull side	100.5	10.1	20.1	30.2	40.2	50.3	60.3	70.4
16	8	Double acting	Push side	402.1	40.2	80.4	120.6	160.8	201.1	241.3	281.5
			Pull side	301.6	30.2	60.3	90.5	120.6	150.8	181.0	211.1
20	10	Double acting	Push side	628.3	62.8	125.7	188.5	251.3	314.2	377.0	439.8
			Pull side	471.2	47.1	94.2	141.4	188.5	235.6	282.7	329.8
25	12	Double acting	Push side	981.7	98.2	196.4	294.5	392.7	490.9	589.0	687.2
			Pull side	755.6	75.6	151.1	226.7	302.2	377.8	453.4	528.9
32	16	Double acting	Push side	1608.5	160.9	321.7	482.6	643.4	804.3	965.1	1126.0
			Pull side	1206.4	120.6	241.3	361.9	482.6	603.2	723.8	844.5

Installation and application

1. When load changes in the work, the cylinder with abundant output capacity shall be selected.
2. Relative cylinder with high temperature resistance or corrosion resistance shall be chosen under the condition of high temperature or corrosion;
3. Necessary protection measure shall be taken in the environment with higher humidity, much dust or water drops, oil dust and welding dregs.
4. Dirty substances in the pipe must be eliminated before cylinder is connected with pipeline to prevent the entrance of particles into the cylinder;
5. The medium used by cylinder shall be filtered to 40μm or below.
6. As both the front cover and piston are short, too large stroke can not be selected.
7. Anti-freezing measure shall be adopted under low temperature environment to prevent moisture freezing.
8. The cylinder shall avoid redial load in operation to maintain the normal and extend service life.
9. If the cylinder is dismantled and stored for a long time, please conduct anti-rust treatment to the surface. Anti-dust cap shall be inserted into the inlet and outlet ports. As the precision of the manufacture and guide is high, Please do not dismantle the fixed block or cylinder cover .

Twin-rod cylinder

TN Series

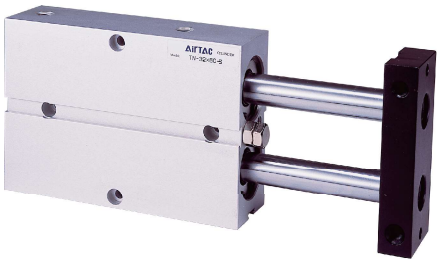

Specification

Bore size(mm)	10	16	20	25	32
Acting type	Double acting				
Fluid	Air(to be filtered by 40μm filter element)				
Operating pressure	0.2~1.0MPa(29~145psi)	0.15~1.0MPa(22~145psi)			
Proof pressure	1.5MPa(215psi)				
Temperature ℃	-20~70				
Speed range mm/s	30~500				
Adjustable stroke mm	-5~0				
Stroke tolerance	$\leq 100^{+1.0}_{0}$	$>100^{+1.5}_{0}$			
Cushion type	Bumper				
Non-rotating tolerance [Note1]	±0.4°	±0.3°			
Port size [Note2]	M5×0.8				1/8"

[Note1] Retract position.

[Note2]PT thread is available.

Add) Refer to P362 for detail of sensor switch.

Symbol



Product feature

1. Enterprises standard is implemented.
2. Embedded installation and fixation mode saves the installation space.
3. It is good resistance to bending and twisting moments.
4. Mounting holes on three sides facilitates multi-position mounting.
5. Bumper in front of the barrel can adjust the stroke of cylinder and relieve impact.
6. Standard configuration of this series has magnet and the type without magnet is not available.

Stroke

Bore size (mm)	Standard stroke (mm)	Max.std stroke
10	10 20 30 40 50 60 70 80 90 100	100
16	10 20 30 40 50 60 70 80 90 100 125 150 175 200	200
20	10 20 30 40 50 60 70 80 90 100 125 150 175 200	200
25	10 20 30 40 50 60 70 80 90 100 125 150 175 200	200
32	10 20 30 40 50 60 70 80 90 100 125 150 175 200	200

[Note] When the stroke less then or equal to 100mm, The dimensions of non-std stroke cylinder has the same dimensions as the next longer stroke std. stroke cylinder. e.g. 35mm stroke cylinder has the same dimensions of 40 std. stroke cylinder.

Ordering code

TN 20 ×50 S □


① ② ③ ④ ⑤

①Model	②Bore size	③Stroke	④Magnet [Note1]	⑤Thread type [Note 2]
TN: Twin-rod cylinder (Double acting type)	10 16 20 25 32	Refer to stroke table for details	S: With magnet	Blank: PT

[Note1] TN Series are all with magnet. [Note2] When the thread is standard, the code is blank.

Inner structure and material of major parts

TN

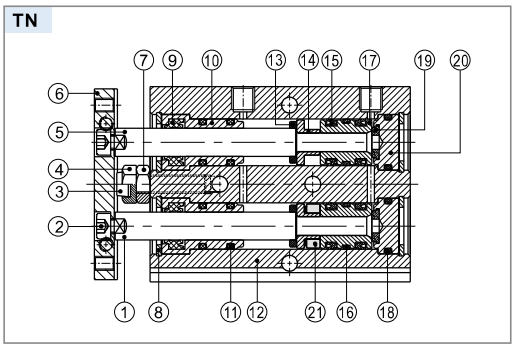

NO.	Item		Material	NO.	Item		Material
1	Piston rod B	Φ32	S45C	12	Body		Aluminum alloy
		Other	SUS304	13	Bumper		TPU
2	Screw		Carbon steel	14	Magnet holder	Φ10	SUS303
3	Bumper		POM			Other	Aluminum alloy
4	Adjustable nut		Carbon steel	15	Piston seal		NBR
5	Piston rod A		S45C	16	Wear ring		Wear resistant material
6	Fixing plate		Free cutting steel	17	Piston	Φ10	SUS303
7	Screw		Carbon steel			Other	Aluminum alloy
8	C clip		Spring steel	18	Seal ring		NBR
9	Wiper seal		NBR	19	Bumper		TPU
10	Front cover		Aluminum alloy	20	Back cover		Aluminum alloy
11	O-ring		NBR	21	Magnet		Sintered metal(Neodymium-iron-boron)

Note: inner structure & material data sheet is based on certain bore size.
Please contact AirTAC if you need inner structure & material data sheet for specific bore size.